

PLAFORAD GK

Suspended plasterboard radiant ceiling panels

Manufactured in accordance with high quality standards.

Radiant exchangers available in 2 sizes:

- 3100mm x 300mm
- 1600mm x 300mm

Each radiant exchanger is made of:



- 2 aluminium profiles width 120mm
- copper pipes $\varnothing 12\text{mm}$
- push-fit spring connectors to fix the exchanger to the backside of the plasterboard panel

Compatible with both standard and high efficiency (graphite) plasterboard panels

It is possible to use plasterboard panels with micro-perforation if acoustic absorption is required

Thanks to the copper pipes and the aluminium profile structure, the GK does not require any maintenance once the installation is completed

All the panels are certified in accordance with EN 14037, EN 14240 and EN 15377

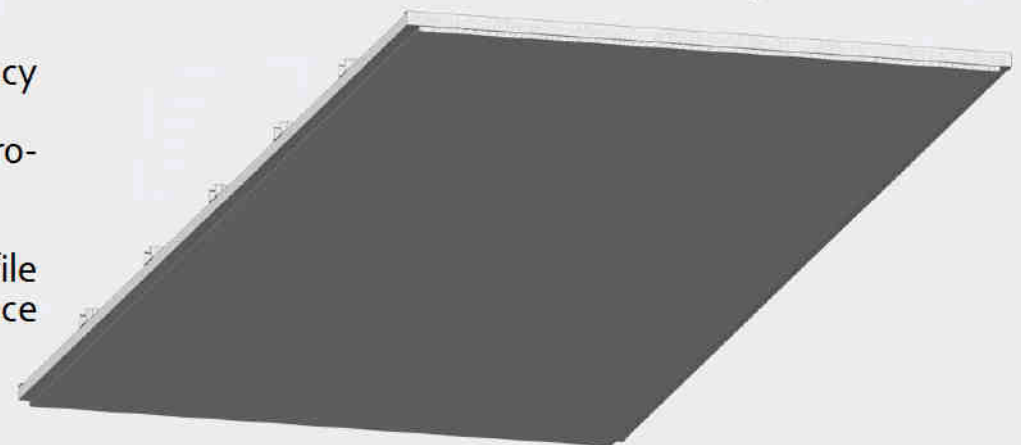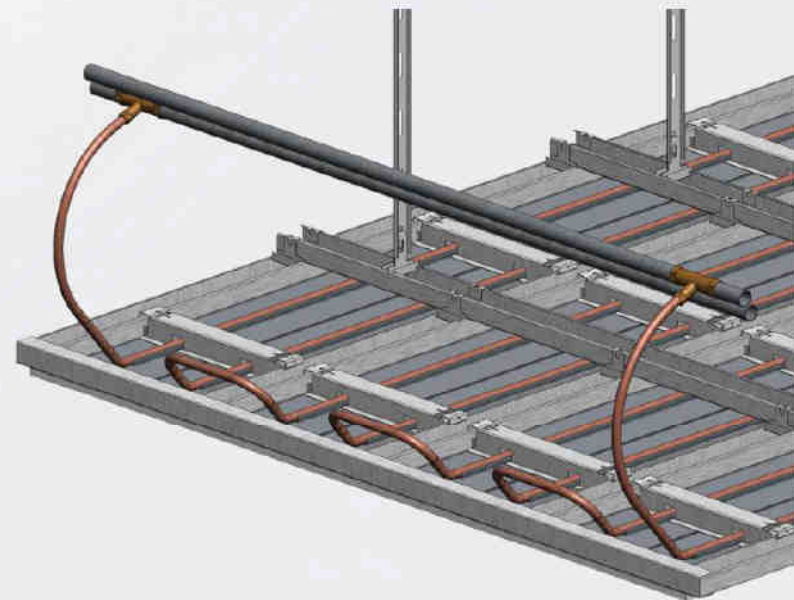



Plaford GK

Plaford GK cutout